



APTUM
CUSTOMIZED
LIGHTING
CREATIONS

CONTOUR PLANTER

MODEL H50/120

DESIGN

Tineke Beunders & Nathan Wierink
2024

DIMENSIONS

W: 54cm/ 21.3in x D: 54cm/ 21.3in x H: 120cm/ 47.2in.

DIMENSIONS PLANTER

W: 50cm/ 19.7in x D: 50cm/ 19.7in x H: 20cm/ 7.9in.
V: 39 liter

ENVIRONMENT

Indoor

MATERIAL

Coated steel, LED

COLOR

Soft White - RAL 9016

LIGHT COLOR

One color zone, 1000+ tones RGB, color adjustable and dimmable.

CONTROLLER

Suitable for Dali / KNX/ Hue/ Zigbee/ Casambi etc.

CABLE LENGTH

Tailor-made for project

VOLTAGE

24 Volt | suitable for 220-240V

WATTAGE

Max. 77 Watt | Average 38 Watt.

LUMEN

108-168 depending on controller type.

CUSTOM POSSIBILITIES

Contour planters can be customized entirely to suit your unique project. Contact us to bring your vision to life.

PRODUCTION PROCESS

The frame is made from extruded steel profile and powder coated. The LED lighting is fixed in the profile. All parts are coated, tested, mounted and packed in-house (Aptum, Eindhoven, NL).

LIGHT SOURCE & ENERGY EFFICIENCY CLASS

RGB-LED, color adjustable, dimmable. The luminaire contains built-in LED lamps. Energy class: A ++ to A.

CERTIFICATIONS


CE, IP 20, 

CLEANING INSTRUCTIONS

Switch off the electricity supply before cleaning.
Clean with soft dry cloth.



MODEL H50/120

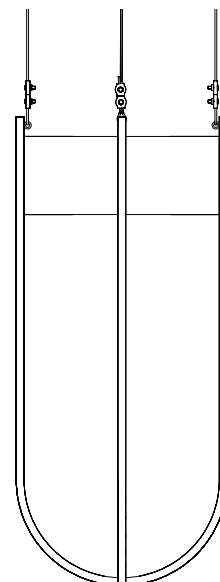



APTUM
CUSTOMIZED
LIGHTING
CREATIONS

CONTOUR PLANTER

MODEL H65/100

DESIGN

Tineke Beunders & Nathan Wierink
2024

DIMENSIONS

W: 69cm/ 27.2in x D: 69cm/ 27.2in x H: 100cm/ 39.4in.

DIMENSIONS PLANTER

W: 65cm/ 25.6in x D: 65cm/ 25.6in x H: 20cm/ 24.8in.
V: 66 liter

ENVIRONMENT

Indoor

MATERIAL

Coated steel, LED

COLOR

Soft White - RAL 9016

LIGHT COLOR

One color zone, 1000+ tones RGB, color adjustable and dimmable.

CONTROLLER

Suitable for Dali / KNX/ Hue/ Zigbee/ Casambi etc.

CABLE LENGTH

Tailor-made for project

VOLTAGE

24 Volt | suitable for 220-240V.

WATTAGE

Max. 69 Watt | Average 34 Watt.

LUMEN

108-168 depending on controller type.

CUSTOM POSSIBILITIES

Contour planters can be customized entirely to suit your unique project. Contact us to bring your vision to life.

PRODUCTION PROCESS

The frame is made from extruded steel profile and powder coated. The LED lighting is fixed in the profile. All parts are coated, tested, mounted and packed in-house (Aptum, Eindhoven, NL).

LIGHT SOURCE & ENERGY EFFICIENCY CLASS

RGB-LED, color adjustable, dimmable. The luminaire contains built-in LED lamps. Energy class: A ++ to A.

CERTIFICATIONS


CE, IP 20, 

CLEANING INSTRUCTIONS

Switch off the electricity supply before cleaning.
Clean with soft dry cloth.



MODEL H65/100

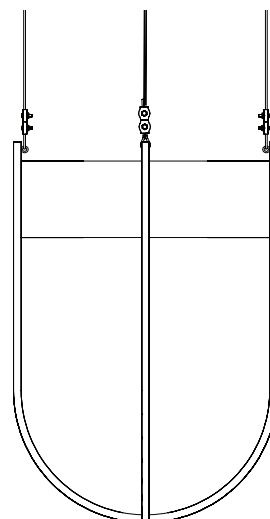



APTUM
CUSTOMIZED
LIGHTING
CREATIONS

CONTOUR PLANTER

MODEL H80/80

DESIGN

Tineke Beunders & Nathan Wierink
2024

DIMENSIONS

W: 84cm/ 33.1in x D: 84cm/ 33.1in x H: 80cm/ 31.5in.

DIMENSIONS PLANTER

W: 80cm/ 31.5in x D: 80cm/ 31.5in x H: 20cm/ 7.9in.
V: 100 liter

ENVIRONMENT

Indoor

MATERIAL

Coated steel, LED

COLOR

Soft White - RAL 9016

LIGHT COLOR

One color zone, 1000+ tones RGB, color adjustable and dimmable.

CONTROLLER

Suitable for Dali / KNX/ Hue/ Zigbee/ Casambi etc.

CABLE LENGTH

Tailor-made for project

VOLTAGE

24 Volt | suitable for 220-240V.

WATTAGE

Max. 60 Watt | Average 30 Watt.

LUMEN

108-168 depending on controller type.

CUSTOM POSSIBILITIES

Contour planters can be customized entirely to suit your unique project. Contact us to bring your vision to life.

PRODUCTION PROCESS

The frame is made from extruded steel profile and powder coated. The LED lighting is fixed in the profile. All parts are coated, tested, mounted and packed in-house (Aptum, Eindhoven, NL).

LIGHT SOURCE & ENERGY EFFICIENCY CLASS

RGB-LED, color adjustable, dimmable. The luminaire contains built-in LED lamps. Energy class: A ++ to A.

CERTIFICATIONS


CE, IP 20, 

CLEANING INSTRUCTIONS

Switch off the electricity supply before cleaning.
Clean with soft dry cloth.



MODEL H80/80

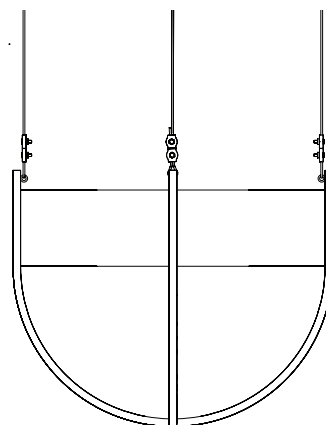



APTUM
CUSTOMIZED
LIGHTING
CREATIONS

CONTOUR PLANTER

MODEL S40/87

DESIGN

Tineke Beunders & Nathan Wierink
2024

DIMENSIONS

W: 44cm/ 17.3in x D: 44cm/ 17.3in x H: 87cm/ 34.3in.

DIMENSIONS PLANTER

W: 40cm/ 15.7in x D: 40cm/ 15.7in x H: 15cm/ 5.9in.
V: 19 liter

ENVIRONMENT

Indoor

MATERIAL

Coated steel, LED

COLOR

Soft White - RAL 9016

LIGHT COLOR

One color zone, 1000+ tones RGB, color adjustable and dimmable.

CONTROLLER

Suitable for Dali / KNX/ Hue/ Zigbee/ Casambi etc.

CABLE LENGTH

Tailor-made for project

VOLTAGE

24 Volt | suitable for 220-240V.

WATTAGE

Max. 57 Watt | Average 28 Watt.

LUMEN

108-168 depending on controller type.

CUSTOM POSSIBILITIES

Contour planters can be customized entirely to suit your unique project. Contact us to bring your vision to life.

PRODUCTION PROCESS

The frame is made from extruded steel profile and powder coated. The LED lighting is fixed in the profile. All parts are coated, tested, mounted and packed in-house (Aptum, Eindhoven, NL).

LIGHT SOURCE & ENERGY EFFICIENCY CLASS

RGB-LED, color adjustable, dimmable. The luminaire contains built-in LED lamps. Energy class: A ++ to A.

CERTIFICATIONS

CE, IP 20, 

CLEANING INSTRUCTIONS

Switch off the electricity supply before cleaning.
Clean with soft dry cloth.



MODEL S40/87

